



勾型

EDGE TYPES

30度角，弯长30mm,可以作为纵向或横向的张紧装置，半径6mm，生产范围达到丝径7mm。
30° open, fold length of leg: 30 mm usable as longitudinal and transverse tightener, radius: 6mm; production range up to and including wire Ø 7mm.

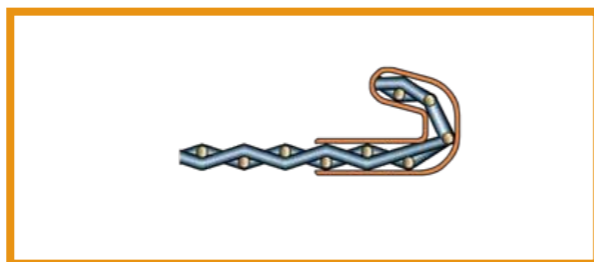

平行折弯用作横向张紧装置，折弯10-20度，半径4mm,生产范围达到丝径6mm。
Parallel bent clamping fold usable as transverse tightener, fold leg opening 10-20°, radius: 4mm; production range up to and including wire Ø 6mm.

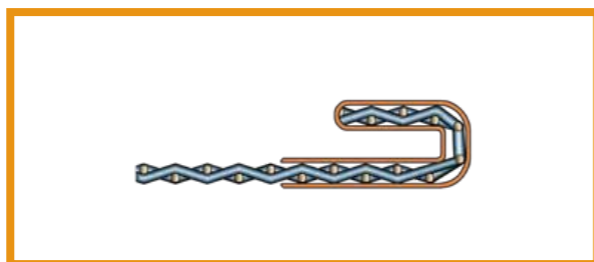

对于小丝小孔的筛网，丝径不超过1mm，折弯角度根据规格而定。
Fold for fine-meshed, thin-wire woven meshes, up to a wire diameter of max. 1 mm; fold openings according to specifications.



勾型

EDGE TYPES

